

FIG. 1

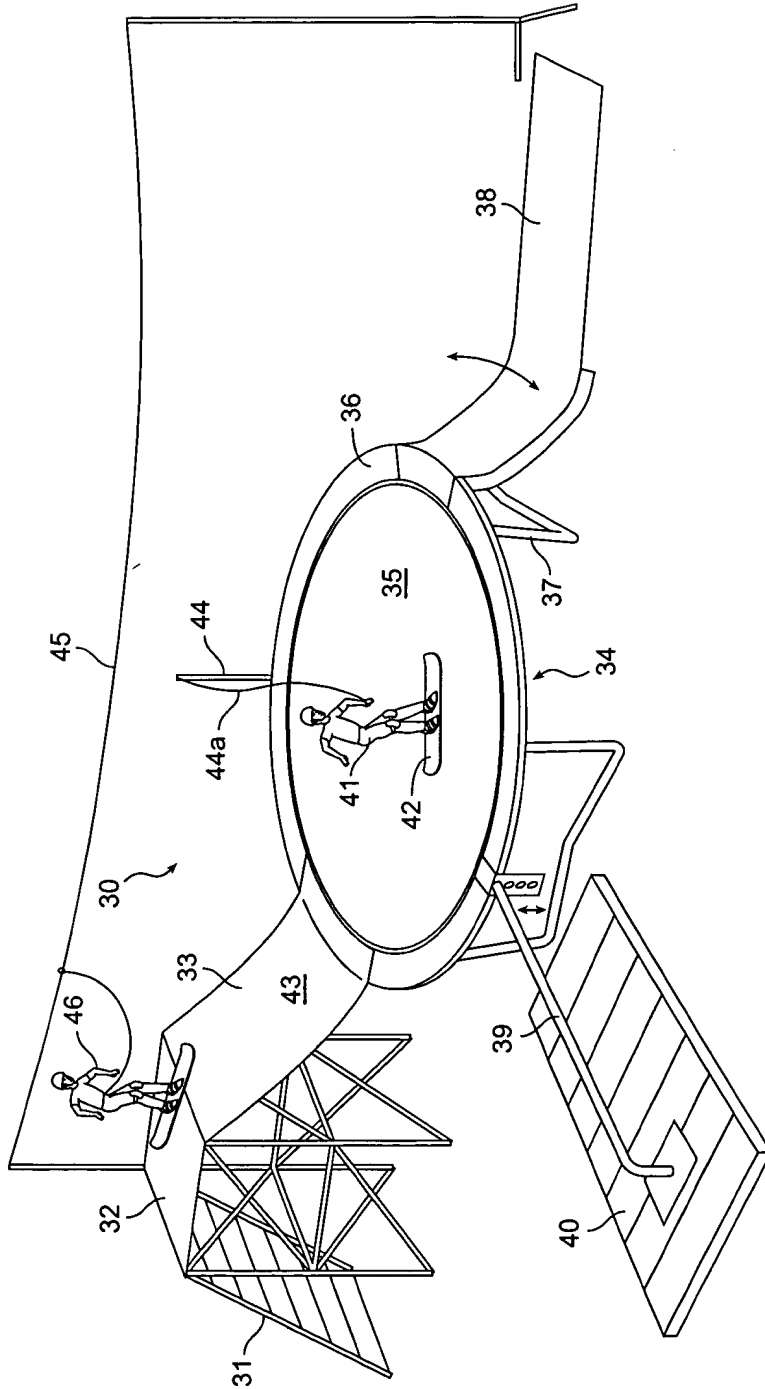


FIG. 2

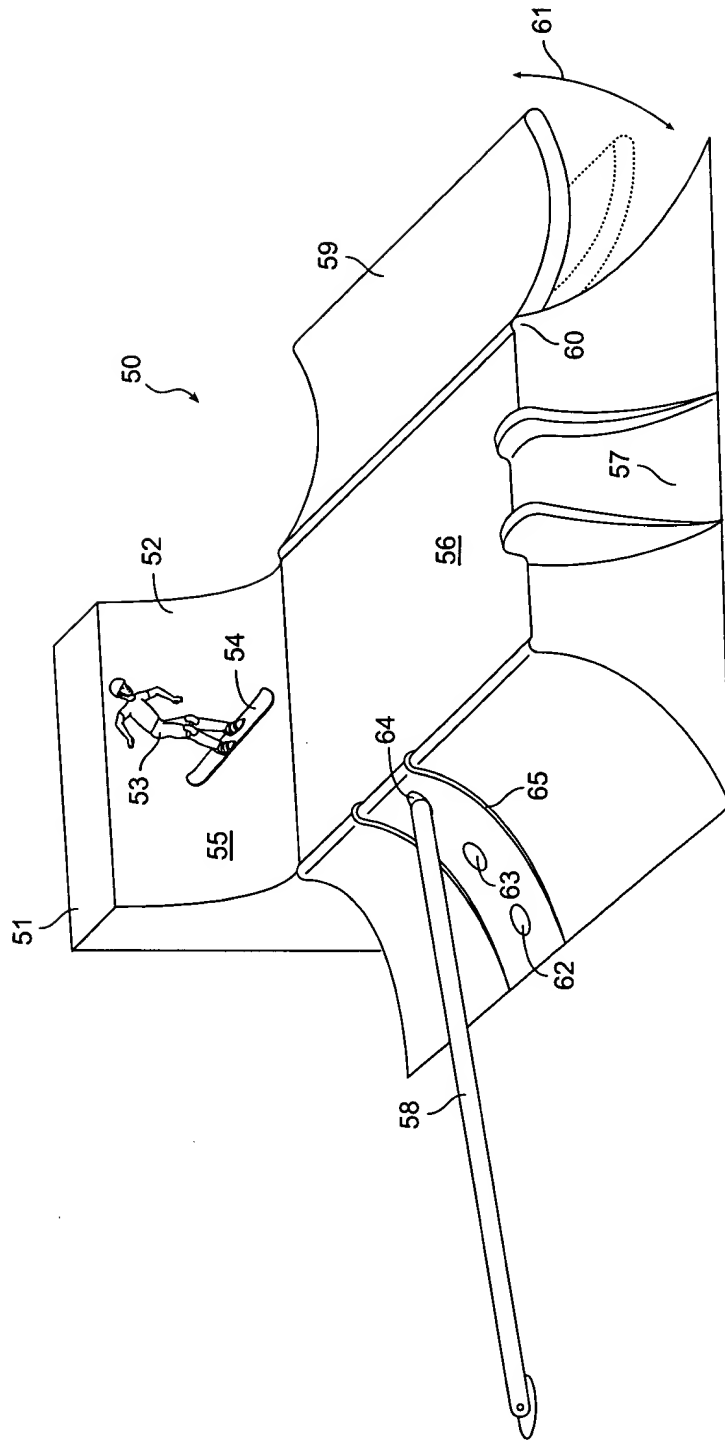


FIG. 3

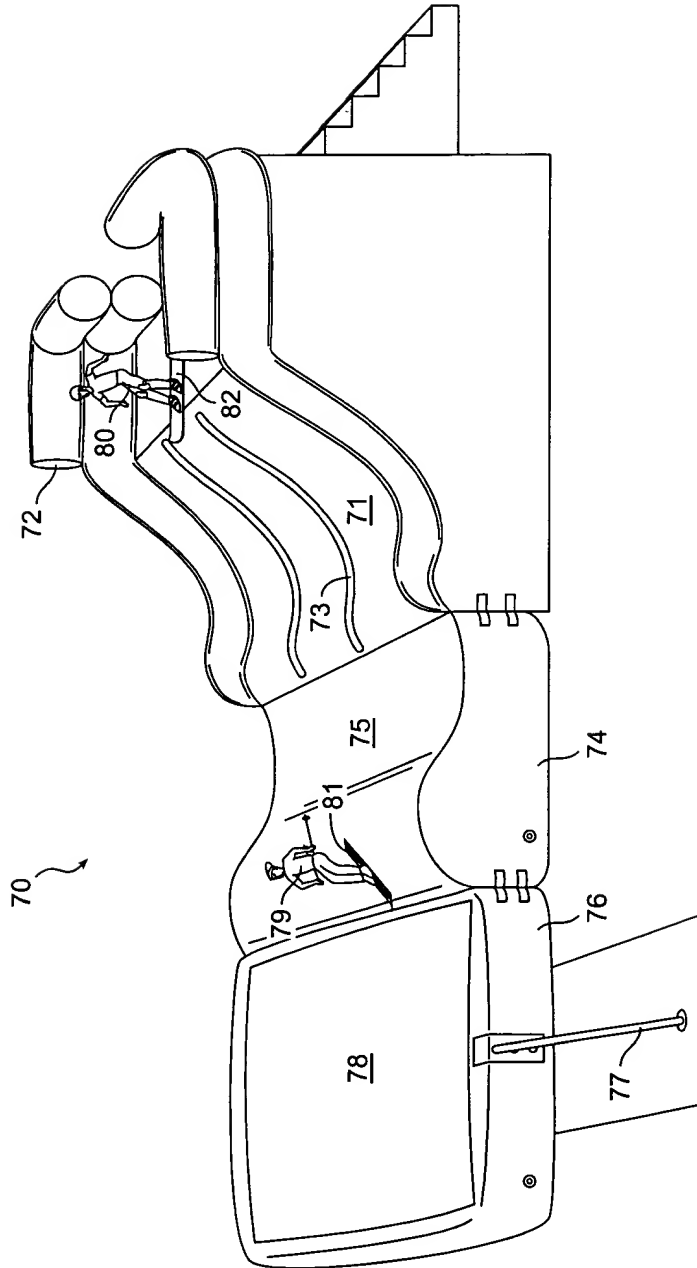


FIG. 4

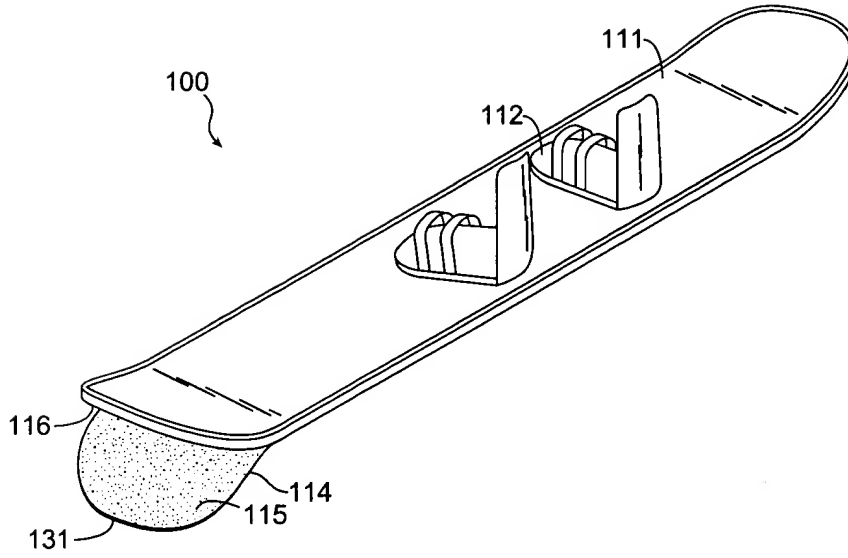


FIG. 5

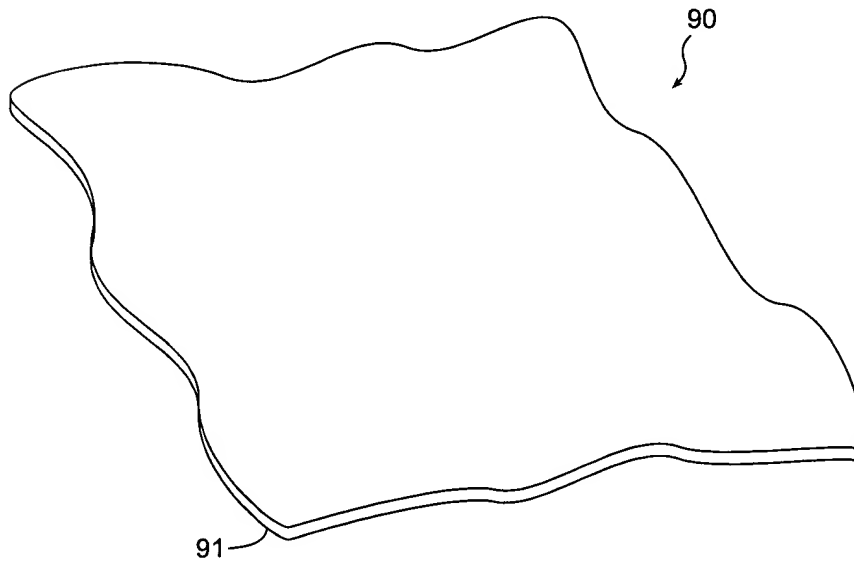


FIG. 6

6/16

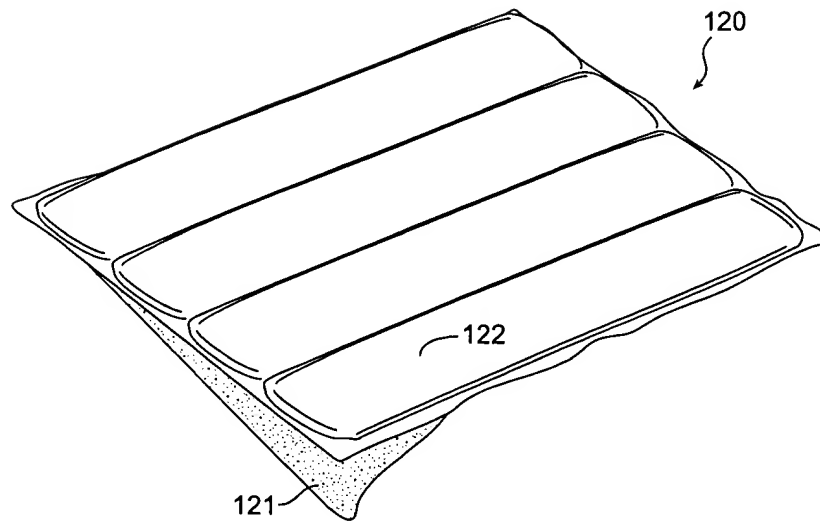


FIG. 7

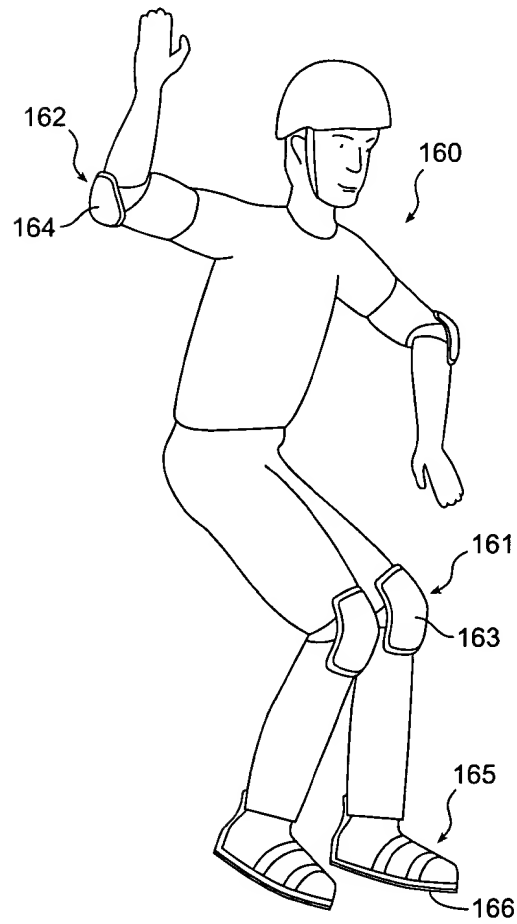


FIG. 8

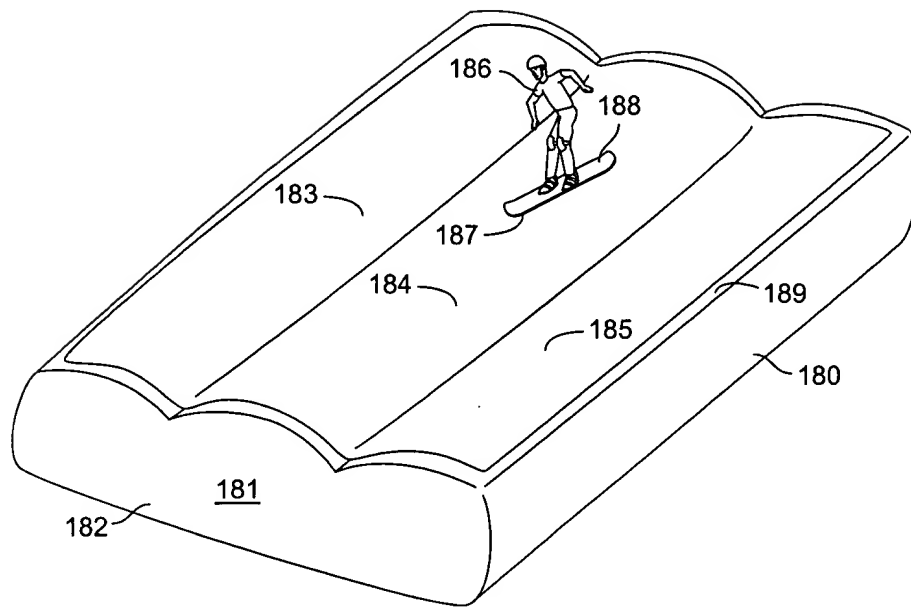


FIG. 9

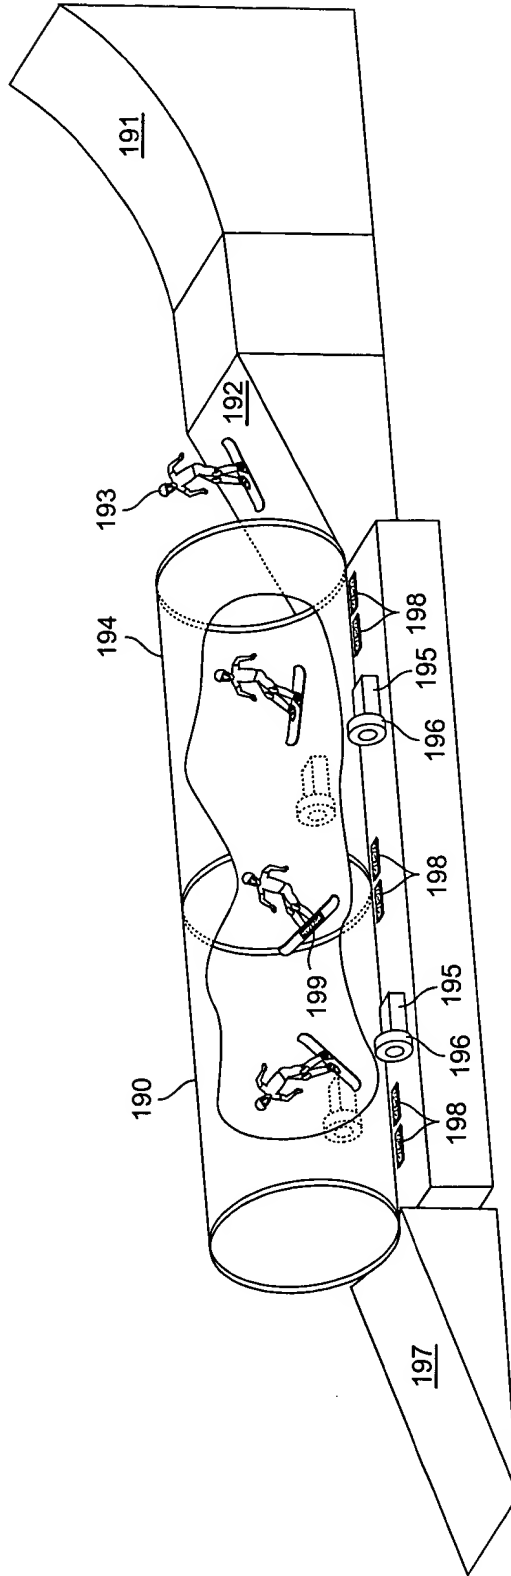


FIG. 10

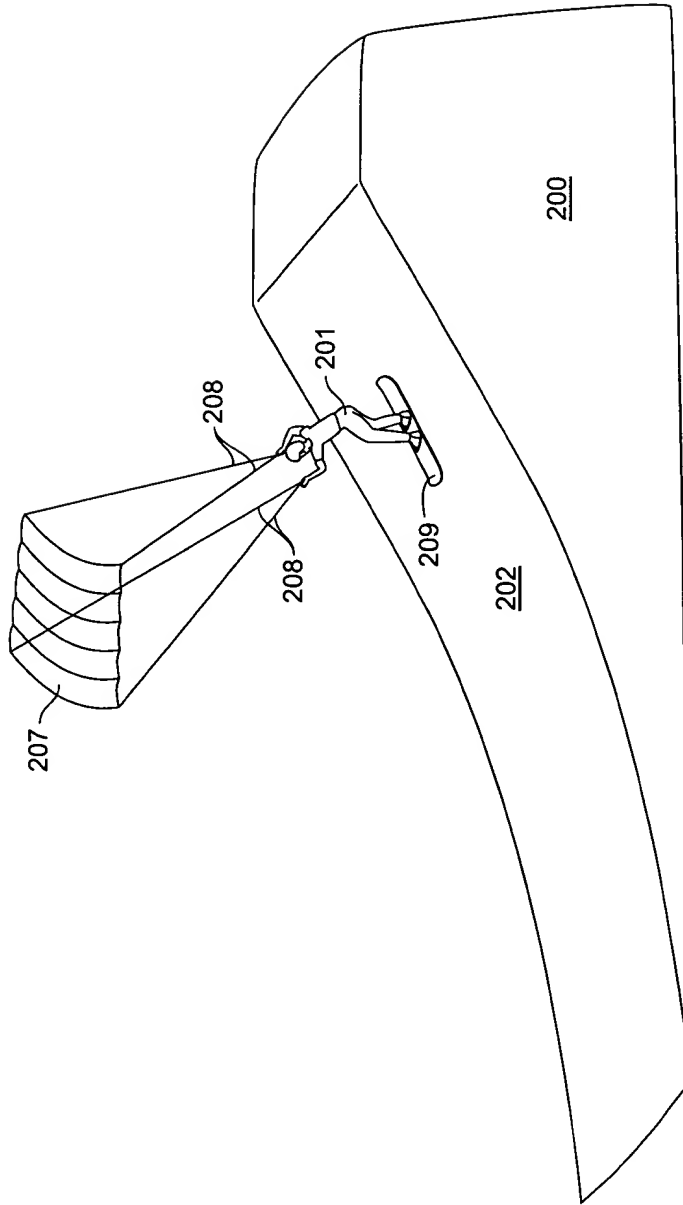


FIG. 11

FIG. 11 is a perspective view of a mechanical assembly. A curved surface 200 is shown with a longitudinal slot 202. A component 201 is mounted on the surface, featuring a bracket 209 and two pins 208. A conical structure 207 is positioned above the assembly.

10/16

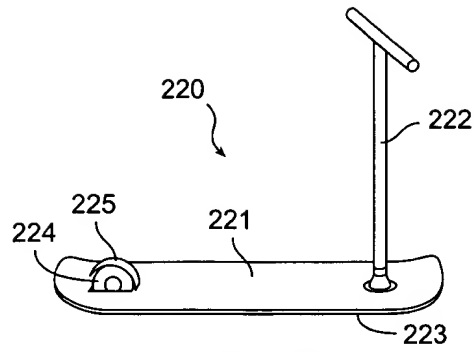


FIG. 12A

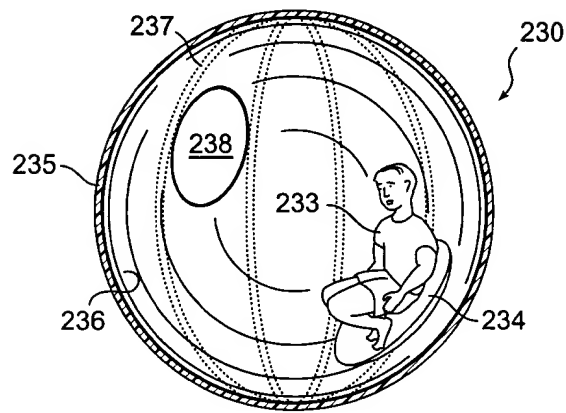


FIG. 12B

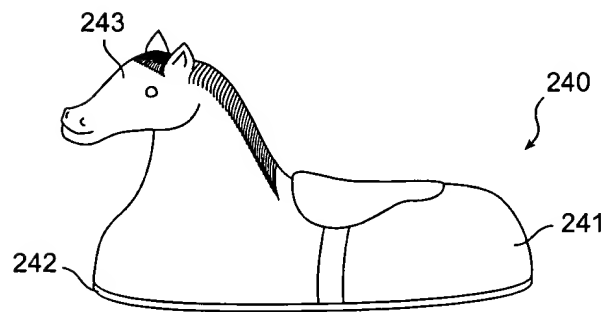


FIG. 12C

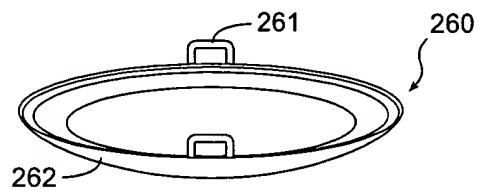


FIG. 12D

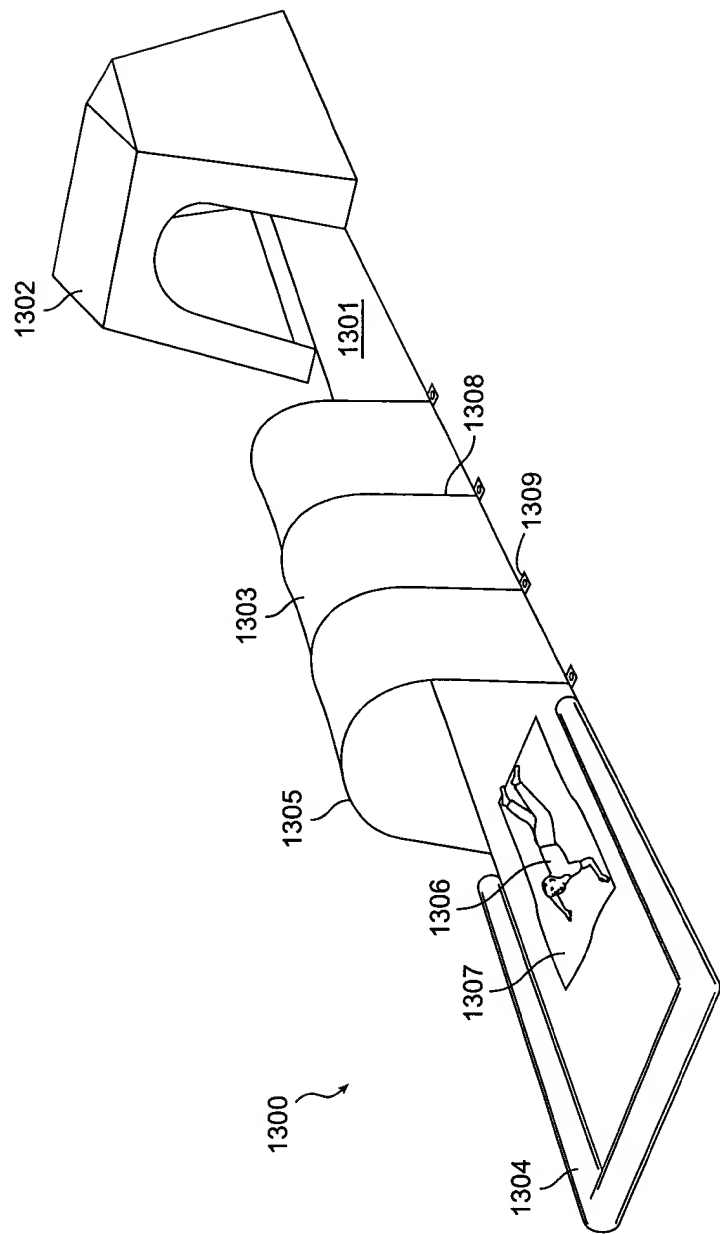


FIG. 13

12/16

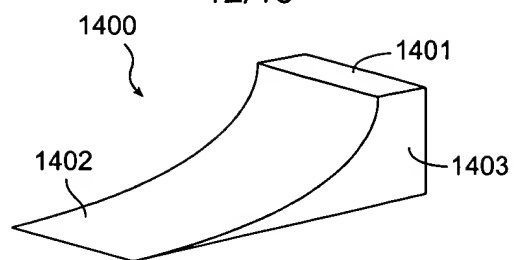


FIG. 14A

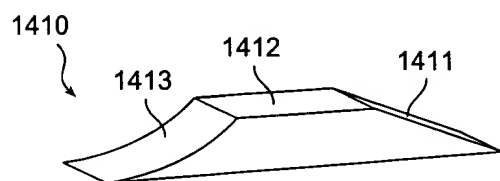


FIG. 14B

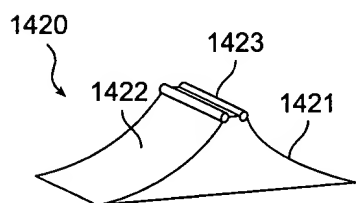


FIG. 14C

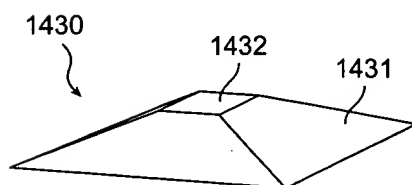


FIG. 14E

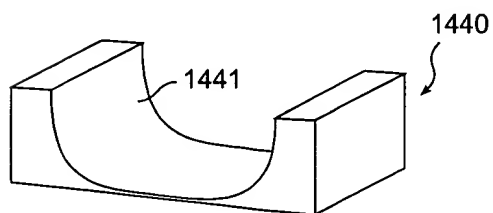


FIG. 14D

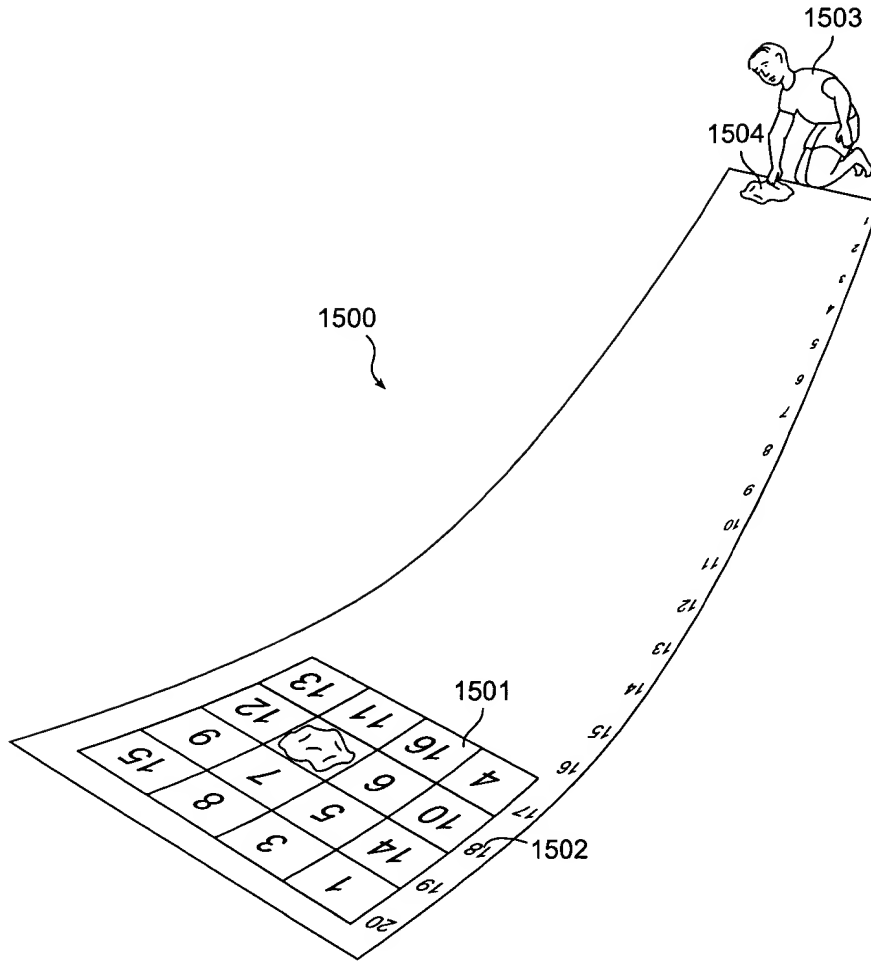


FIG. 15

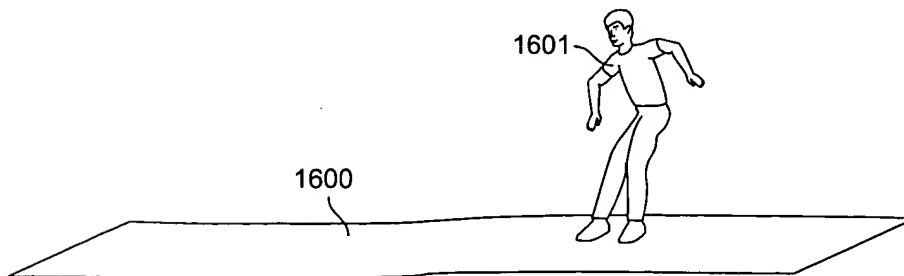


FIG. 16A

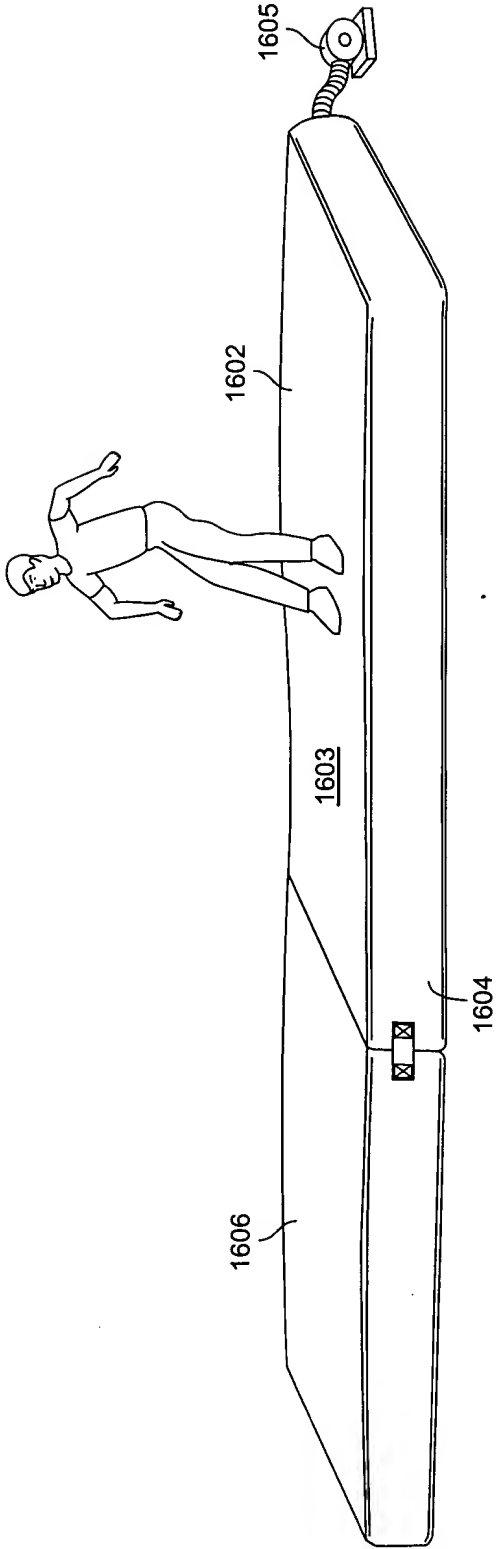


FIG. 16B

15/16

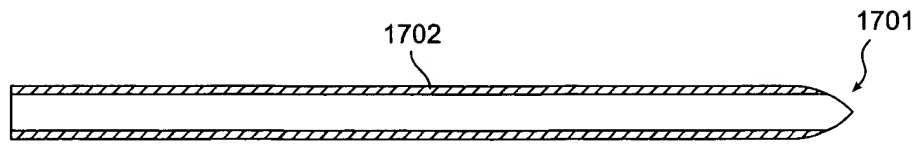


FIG. 17A

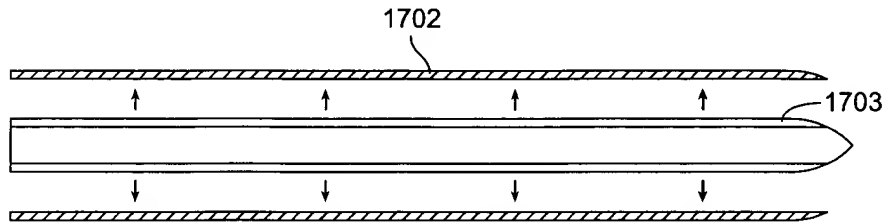


FIG. 17B

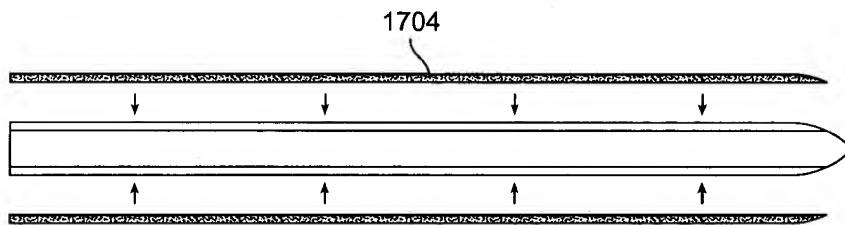


FIG. 17C



FIG. 18A



FIG. 18B

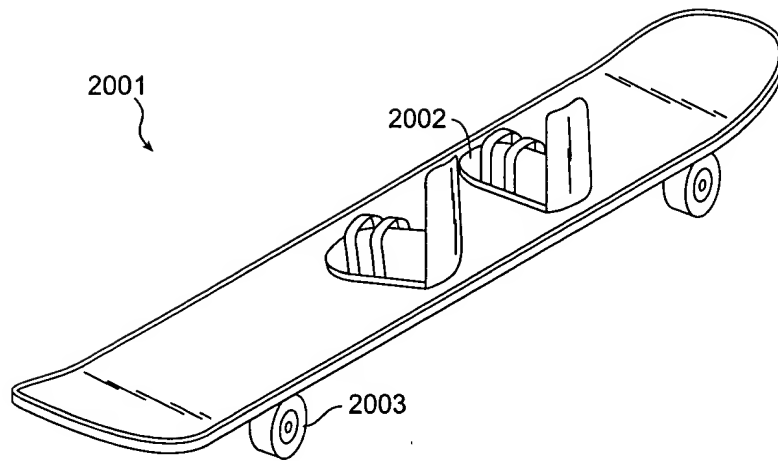


FIG. 19